

MiSP Simple Machines/Levers Worksheet #2 L1
Clever Lever 3 (AIMS Machine Shop)

Name _____

Date _____

L 1, 2, 3

Key Question: How does a lever work differently when your push or pull (effort) is closer to the fulcrum than the object you are trying to move (resistance)?

Introduction: This experiment uses a third class lever where effort is applied between the fulcrum and the resistance. When a third class lever is used, more effort force is needed than would be used to move the resistance without the lever. So why use a third class lever? A third class lever is used because the resistance moves a greater distance than the effort - an increased distance and an increased speed! Third class levers include fly swatters, baseball bats, lacrosse sticks, brooms, and golf clubs.

The mechanical advantage is less than or equal to 1. Remember, a mechanical advantage of 0.5 means that you will need twice the effort force to move a resistance.) A mechanical advantage of 1 means that the effort force will be the same as the force needed to move the resistance without the simple machine. A mechanical advantage of greater than one means that the effort force will be less than the force needed to move the resistance without the simple machine.

There are several ways to calculate mechanical advantage in levers. In this experiment, we will do it by dividing effort arm length by the resistance arm length:

$$\text{Mechanical advantage} = \frac{\text{Effort arm length (cm)}}{\text{Resistance arm length (cm)}}$$

Another way to calculate mechanical advantage is:

$$\text{Mechanical advantage} = \frac{\text{Distance effort moves (cm)}}{\text{Distance resistance moves (cm)}}$$

Both of these equations are for "ideal" mechanical advantage which means they are calculated value based on lever distance measurements rather than the actual forces (effort and resistance) used on the lever.

Procedures: You are going to do Part One of this experiment. Follow the set-up instructions and experimental procedures on pp. 69-70. Your teacher will give more instructions on the set-up. Data will be entered for the experiment on the chart on p. 70 of **AIMS Machine Shop**. Besides carefully making measurements and entering your data, be aware of the changes in the effort force that is applied at the various effort arm lengths used in the experiment.

Graph instructions and questions are on this worksheet.



Data:

Enter the measurements of how far the effort moved to move the resistance 4.0 cm in the column 'Distance Effort Moves' on the chart on p. 70.

Complete the other columns

Graph the data on the next page to show the relationship between the mechanical advantage (no unit) and distance effort moves (cm).

- Label the x axis with mechanical advantage
- Label the y axis with distance effort moves (cm)
- Draw a best fit line between the points.

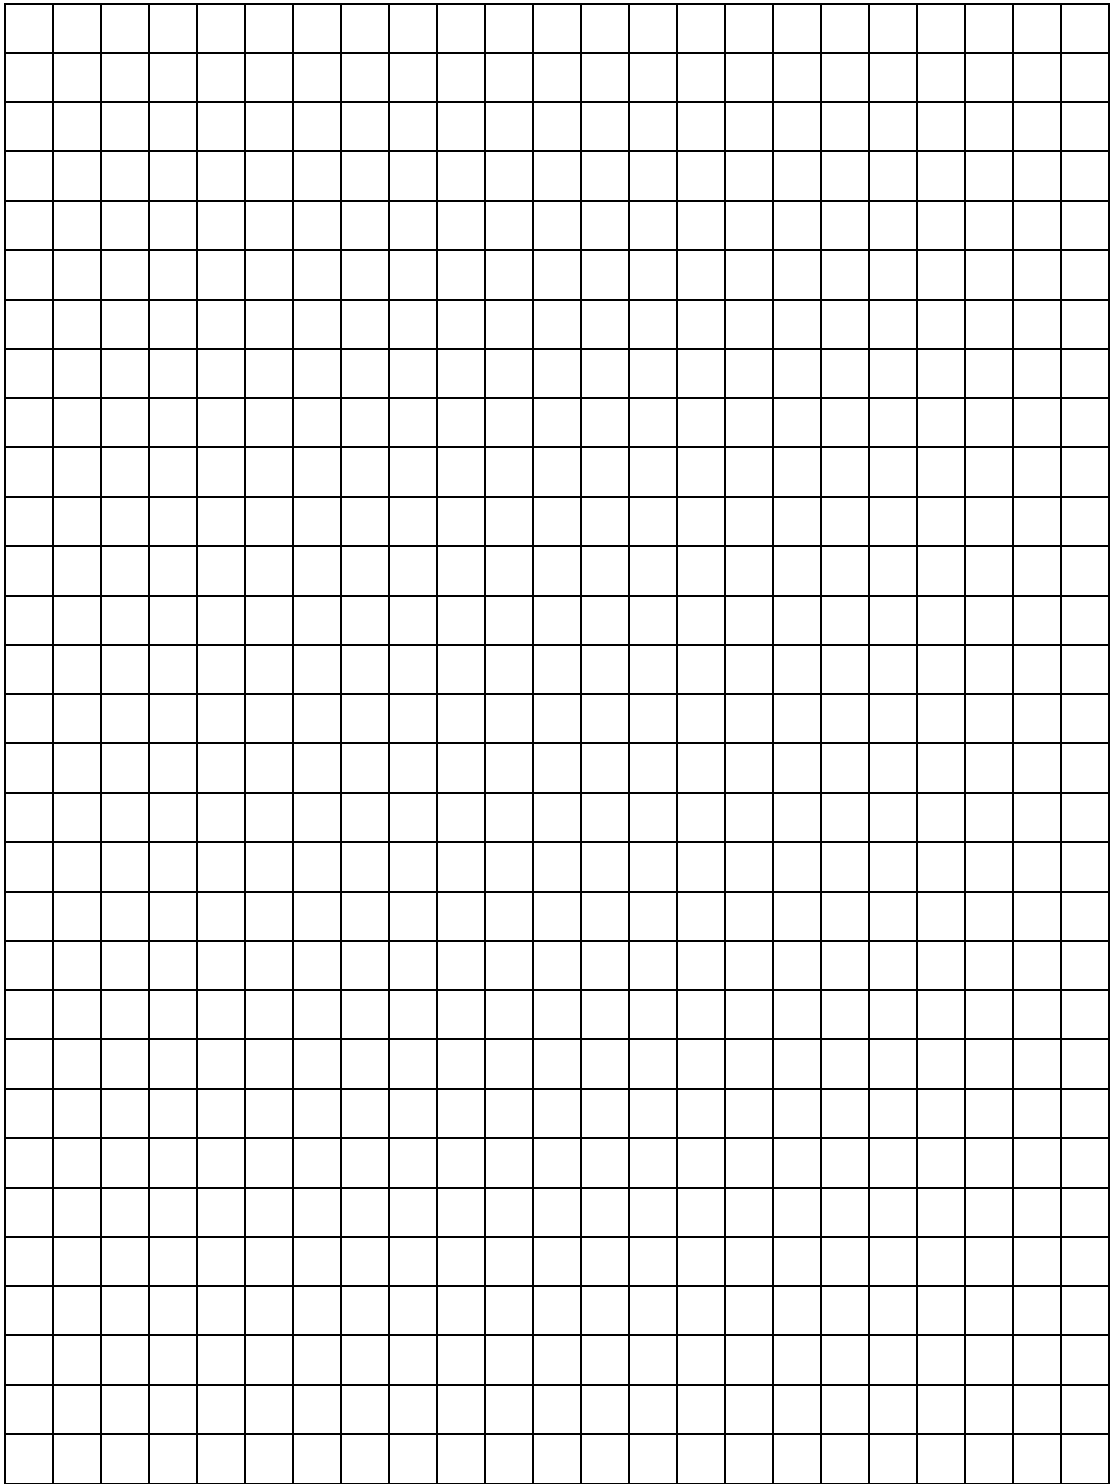

Discussion L1-3

Clever Lever 3 Connecting Learning (AIMS Machine Shop pp. 73-74 -- #2 and 6 - not required)

1. How does a third-class lever differ from the first and second-class levers?

3. As the distance of the effort arm gets greater, what happens to the distance the effort must move to make the resistance move 4 cm?

4. As the distance of the effort arm gets greater, what happens to the ideal mechanical advantage?

5. What similarities and differences are there between the ideal mechanical advantage and the ratio of the distance the forces moved [column 6: effort distance/resistance distance]?

Additional questions:

7. Use the graph to predict the distance the effort moves if the effort arm length is 10 cm: (Remember that mechanical advantage = $\frac{\text{Effort arm length (cm)}}{\text{Resistance arm length (cm)}}$)

10 cm (mechanical advantage = _____) _____ cm

8. Use the words increases or decreases to complete the sentence below:
If a third class lever has a resistance arm length of 80 cm and moves a resistance
4 cm, increasing the effort arm length _____ the mechanical
advantage and _____ the distance the effort moves.